




### Frequency Response, Digital IN

(AES/EBU input; identical for 8 / 4 / 2  $\Omega$  load)

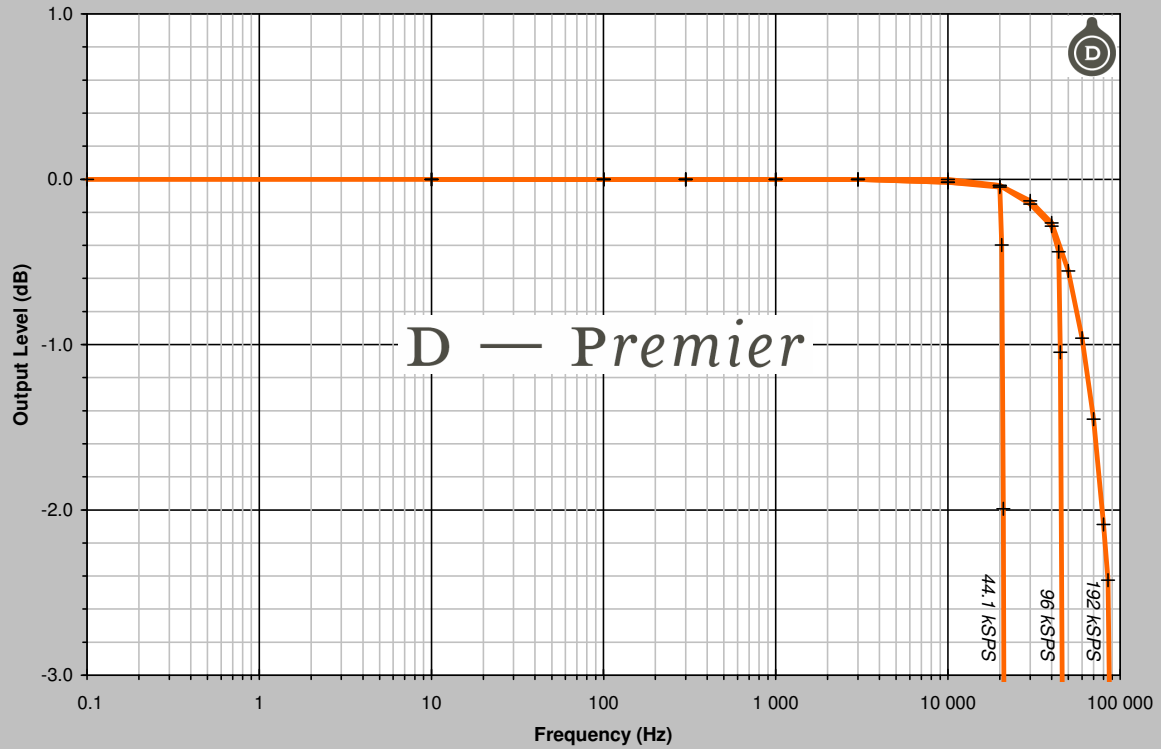

### Frequency Response, Analog IN

(Line input @ 192 kSPS config; identical for 8 / 4 / 2  $\Omega$  load)

